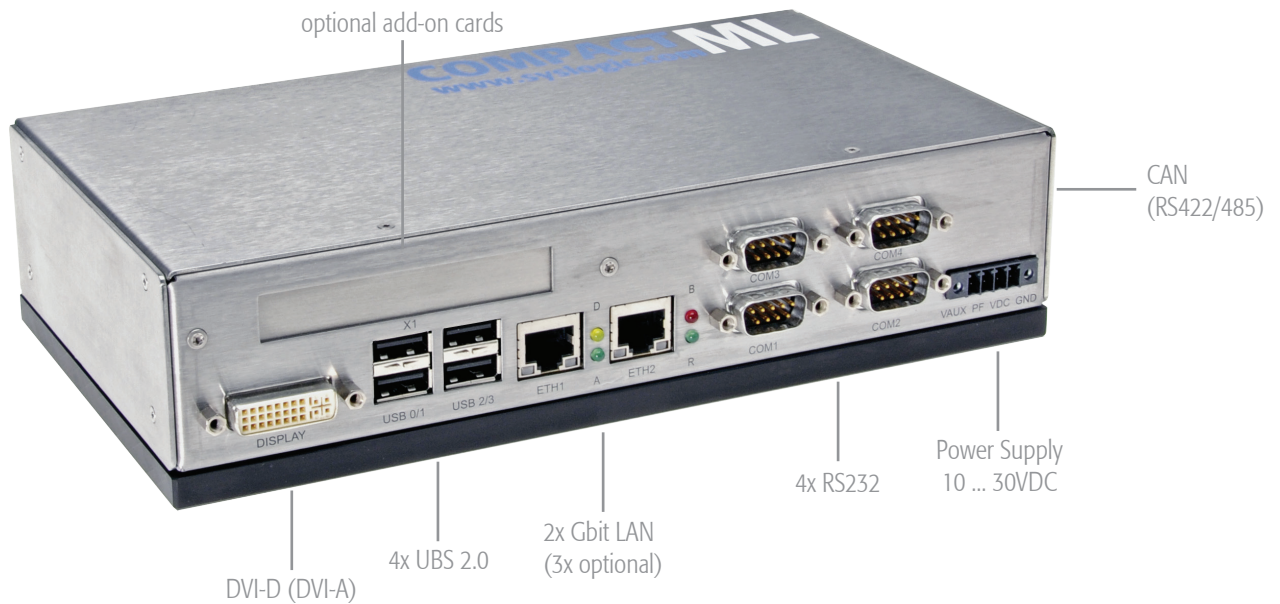


COMPACT-ML Series

Industrial compact PC with Intel® Atom™ E6x0T processor

optional
UMTS / GPS / Wi-Fi

IPC/COMPACT71

This fan less COMPACT71-ML generation is based on the latest Intel® Atom™ processor technology and offers a wide range of interface options. Additional functions (e.g. UMTS, WiFi or digital I/O) can be integrated through PC/104 compatible cards. The robust and uncompromising industrial design allows the implementation in the most demanding applications and guarantees long term availability.

- 24/7 continuous operation
- Fan less
- Maintenance free
- Long term availability

 Windows Embedded Standard 7

 Windows Embedded Standard 2009

 Windows Embedded CE 6.0



Product Highlights

Hardware Watchdog
Temperature supervision
-40...+85°C on component level
Real time clock
Persistent Flash BIOS
Optional goldcap backup
ESD- protection on all interfaces
No active cooling required
No moving parts

Product Feature

Intel® Atom™ E620T, E640T, E680T
up to 1.6GHz
RAM soldered on board up to 2GB
Socket for CFast
Ethernet, USB, RS232, RS422/485
Isolated CAN
Stainless steel housing

Markets / Applications

Industrial Automation
Traffic control
Railway industry
Transportation and vehicle construction
Maritime
Cleantech
Medical

	Order Code	IPC/ML71F16-A101E	IPC/ML71F16-A102E	MySyslogic ¹
Processor / Performance				
Intel Atom E680T 1.6GHz		•	•	•
Intel Atom E640T 1.0GHz		optional	optional	optional
Intel Atom E620T 0.6GHz		optional	optional	optional
Memory				
56 kB L1 cache (32kB instruction / 24kB data)		•	•	•
512 kB L2 cache		•	•	•
1 GB DDR2		•	•	•
2 GB DDR2		optional	optional	optional
Features				
Real time clock PC compatible		•	•	•
Hardware Watchdog		•	•	•
Temperature supervisor		•	•	•
Intelligent power management		•	•	•
Battery backup		•	•	•
Goldcap backup		optional	optional	optional
Communication Interfaces				
DVI-D up to 1280x1024 (SXGA) - Digital (DVI-I)		•	•	•
VGA up to 1280x1024 (SXGA) - Analog (DVI-I) ¹		optional	optional	optional
CFast socket		•	•	•
SATA interface standard ²		•	•	•
USB version 2.0 (high or full speed)		4	4	up to 6 ³
USB version 2.0 on internal header		2	2	up to 3 ³
Ethernet 10/100/1000 Mbit (Intel 82574)		3	2	up to 3 ³
RS232 ESD protected (DSUB9)		3	4	up to 6 ³
RS232 ESD protected ²		2	2	up to 3 ³
RS422/485 ESD protected (DSUB9)				up to 3 ³
CAN version 2.0b, SJA1000, ESD protected, isolated (DSUB9)		1	2	up to 2 ³
SPI ²		•	•	•
PC/104 bus ²		•	•	•
HD Audio / Speaker ²		•	•	•
Technical Data				
Dimensions w227.6 x h54.5 x d127 mm (housing)		•	•	•
Net weight [gram]		1400	1400	1400
Input voltage 10 ... 30VDC non-isolated		•	•	•
Input voltage 19 ... 30VDC isolated ¹		optional	optional	optional
Current consumption typ. [mA] @ 24V without Add-Ins		500	500	
Power consumption typ. [Watt] @ 24V without Add-Ins		12	12	
Environmental Conditions				
Standard operating temperature (ambient) ⁴		-40°C ... +70°C	-40°C ... +70°C	-40°C ... +70°C
Storage temperature -40 ... +85° C		•	•	•
Protection standard: IP40		•	•	•
Shock: designed to meet EN60068-2-27		•	•	•
Vibration: designed to meet EN60068-2-6		•	•	•
EMC according to EN-55022/55024/61000-6-2/61000-6-4		•	•	•
MTBF ~ 200 000h (22.8 Years)		•	•	•
Optional enhancement cards				
IPC/SIC4 (4 channel serial interface RS232, RS422, RS485)		optional	optional	optional
IPC/DIO32 (16 digital I/O)		optional	optional	optional
IPC/REL12 (12 relay and 8 transistor output)		optional	optional	optional
Wireless Module (GSM/UMTS / GPS / WiFi) ¹		optional	optional	optional

¹ Please contact factory for minimum order quantities

² Internal connector

³ Either RS232, RS485 or CAN (8 in total)

⁴ Depending on installation situation and interface connection. Please see user documentation.

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2013 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Täferstrasse 28
CH-5405 Baden Dättwil

Version 1.2 | November 2014

For further information and support:
info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40 Switzerland (Headquarters)
+49 7741 967 14 20 Germany and Austria

 **syslogic**
industrial computing